




SCS, INC CUSTOM CYLINDER APPLICATION DATA FORM

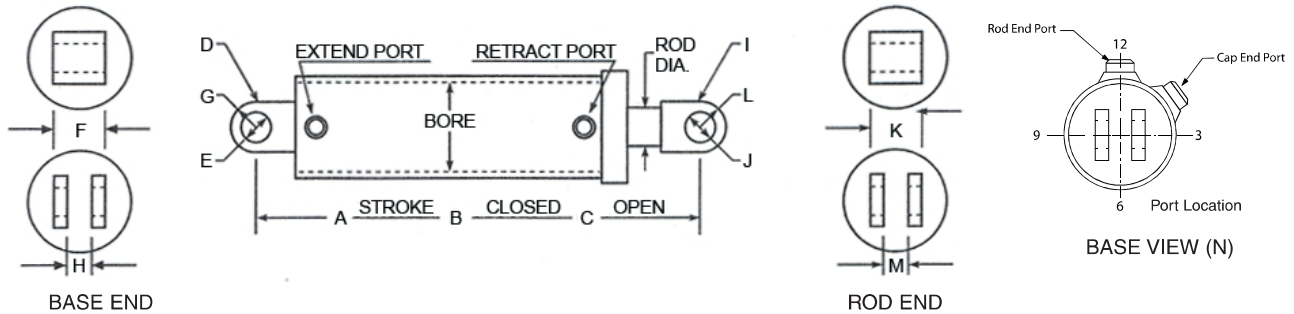

Cylinder application _____

Single - or Double-acting _____ System operating pressure Normal ____ Max. ____

Bore _____ Is there a relief valve in system ____ Setting ____

Rod diameter _____ System flow in G.P.M Min. ____ Max. ____

Head & gland design _____ System operating temp. Normal ____ Max. ____

Piston design _____ Fluid type _____

Mounting conditions ____Vert.____ Horz.____ Incline angle Load holding requirements _____

Any side or eccentric loading possible _____ Environmental condition _____

Average cycles per week _____ Cylinder max force during: Push____ Pull____ Both ____

A : Total stroke _____ I : Rod mount type or code _____

B : Closed length _____ J : Rod pin diameter _____

C : Open length _____ K : Rod mount width _____

D : Base mount type or code _____ L : Rod mount radius _____

E : Base pin diameter _____ M : Rod clevis gap (if applicable) _____

F : Base mount width _____ N : Base End Port Location _____

G : Base mount radius _____ Rod End Port Location _____

H : Base Clevis Gap (if applicable) _____

Special mounting (if applicable) _____

Extend port size and type _____ Extend port location _____

Retract port size and type _____ Retract port location _____

Special features or comments _____
(This includes break-a-way force, shock loads, etc.)

Requested by: Company Name _____ Quantity / Shipment _____

Address _____ Annual Usage _____

City _____ State ____ Zip _____

Phone _____ Fax _____

Contact _____

Phone (877) 905-7325 Fax (586) 791-9033



Seal & Cylinder Source, Inc.
44250 Groesbeck Hwy.
Clinton Twp. MI 48036

NORTH AMERICA
PHONE 1-586-791-9001
FAX 1-586-791-9033

SALES OFFICE HOURS
8 A.M. TO 8 P.M. EASTERN TIME
www.sealandcylinder.com

WORLDWIDE
PHONE 1-877-905-SEAL
sales@sealandcylinder.com

TECHNICAL INFORMATION